


B+W ID **47098**
Mica Holder 498 Type L8 HV
SiF 0,35/AWG22 200mm

rated current 5A
rated voltage 150V
rated temp. T180

B+W interface L8

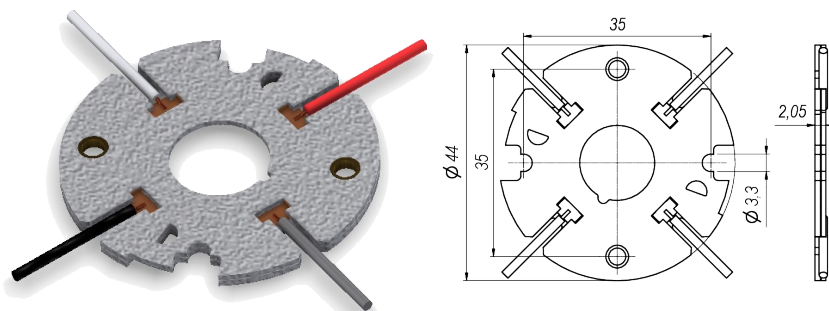

VDE certificate	40041342		fixing	2 or 4 screws M3	Flyer	B+W 430_OnePager_EN
UL certificate	E472943Sec1		max. torque	0,3 Nm	Tec. Guide	B+W 430_Technical Guide
CE certificate	430CE					
material						
housing	Mica					
contact	CuSn					

COB served by Holder		Optic served by Holder	
Nichia	NVCWJ024Z-V1MT Tunable	Gaggione adapter:	HADAR50 (-ZOOM) HADAR50 H90* + C16142_HEKLA-SOCKET-K
		Gaggione adapter:	HADAR70 (-ZOOM) HADAR70 H90* + C16142_HEKLA-SOCKET-K
		Ledil adapter:	ADELIA-110 C16142_HEKLA-SOCKET-K + C18323_ADELIA-110-ADAPTER-C
		Ledil adapter:	ADELIA-50 C16142_HEKLA-SOCKET-K + C18432_ADELIA-ADAPTER-C
		Ledil adapter:	ADELIA-70 C16142_HEKLA-SOCKET-K + C18432_ADELIA-ADAPTER-C
		Ledil adapter:	ADELIA-75 C16142_HEKLA-SOCKET-K + C18432_ADELIA-ADAPTER-C
		Ledil adapter:	ADELY-50 (HLD2-C ; Hekla) C16142_HEKLA-SOCKET-K + C18691_YASMEEN-50-HLD2-C
		Ledil adapter:	ADELY-70 (HLD2-C; Hekla) C16142_HEKLA-SOCKET-K + C19427_YASMEEN-70-HLD2-C
		Ledil adapter:	AMY-110-C (Hekla) C16142_HEKLA-SOCKET-K
		Ledil adapter:	AMY-50-xx-C2 (Hekla) C16142_HEKLA-SOCKET-K
		Ledil adapter:	AMY-70-xx-C2 (Hekla) C16142_HEKLA-SOCKET-K
		Ledil adapter:	BARBARA-xx-G2 (Hekla) C16142_HEKLA-SOCKET-K
		Ledil adapter:	BROOKE-xx-G2 (Hekla) C16142_HEKLA-SOCKET-K
		Ledil adapter:	CARMEN-50-xx-C (Hekla) C16142_HEKLA-SOCKET-K

COB served by Holder	Optic served by Holder	
	Ledil adapter:	CARMEN-xx-C (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	ILONA (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	MIRELLA-G2 (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	RONDA-xx-C (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	WINNIE-xx-C (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	YASMEEN-50-xx-C (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	YASMEEN-70-xx-C (Hekla) C16142_HEKLA-SOCKET-K
	Ledil adapter:	ZORYA-SC-C (Hekla) C16142_HEKLA-SOCKET-K
	Ledlink adapter:	LL01CR-CEN-xxL02 C16142_HEKLA-SOCKET-K + 630/50574 Adaptor Ledlink
	no optic interface adapter:	35mm fixing distance