




Lumistrips

DATASHEET

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K
2505LM 196 LEDS 24V 28.5W 120° 28X28CM

SKU: 36739

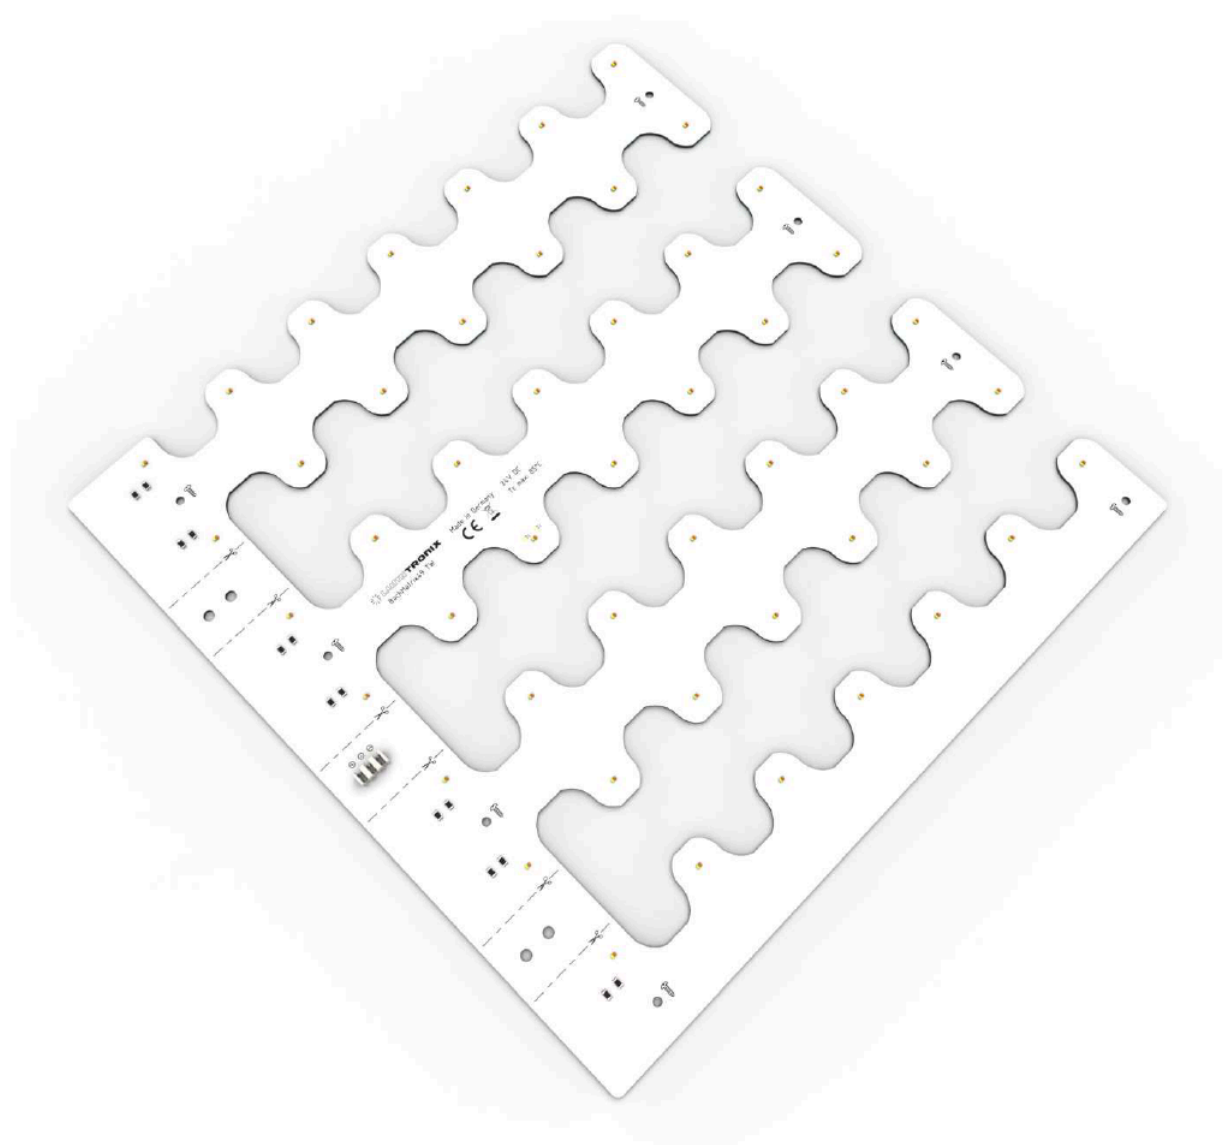


BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

Article number (SKU)		36739	
Product name		BackMatrix-49-2080 Nichia LED Module RGBW 4000K 2505lm 196 LEDs 24V 28.5W 120° 28x28cm	
Classification		Professional	
Model identifier (equivalent models)		BackMatrix 49 RGBW	
Photometric data (at TJ = 65°C, ± 10%)			
Light color		RGBW	
Binning		3-Step MacAdam (White)	
Color temperature (K)		Red Blue Green White 4000 K	
Dominant wavelength (nm)		R: 631 B: 466 G: 518 nm	
Luminous flux (lm)		R: 150 G: 905 B: 195 W: 1255 RGBW: 2505 lm	16000 lm/sqm at 4000K
Radiant power (mW)			
CRI (Ra)		>80	
Efficiency (lm/W)		149 lm/W for White 4000K	
Beam angle FWHP		180°	
Lifetime L80B10C1 (h)		>60000 h	
Photometric code		840/339 for White 4000K	
Electrical data (at TJ = 65°C, ± 10%) (reference settings)			
Operating mode		Constant voltage	
Voltage (V)		24 V	
Current (mA)		R: 175 G: 350 B: 315 W: 350 mA	
Power (W)		R: 4.2 G: 8.4 B: 7.5 W: 8.4 RGBW: 28.5 W	108 W/sqm at 4000K
Dimmable		Yes	
Dimensions / Mechanical data		Metric units	Imperial units
Length		280 mm	11.004"
Width		280 mm	11.004"
Height		6.65 mm	0.261"
Area (sqm / sqft)		0.0784 sqm	0.844sqft
Number of LEDs (pcs)		196 pcs	
Weight (g)		150 g	
Temperatures			
Operating temperature at Tc		-40 °C to +85 °C	
Ambient temperature		-40 °C to +50 °C	
Storage temperature		-40 °C to +100 °C	
Approvals / Certifications			
CE / RoHS / Reach		Yes	
EN 62471 Risk group		RG0	
Energy efficiency class		G	
Mains voltage luminous efficacy (lm/W)		108 lm/W	
Version			
Date		15. Sept 2022	




BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

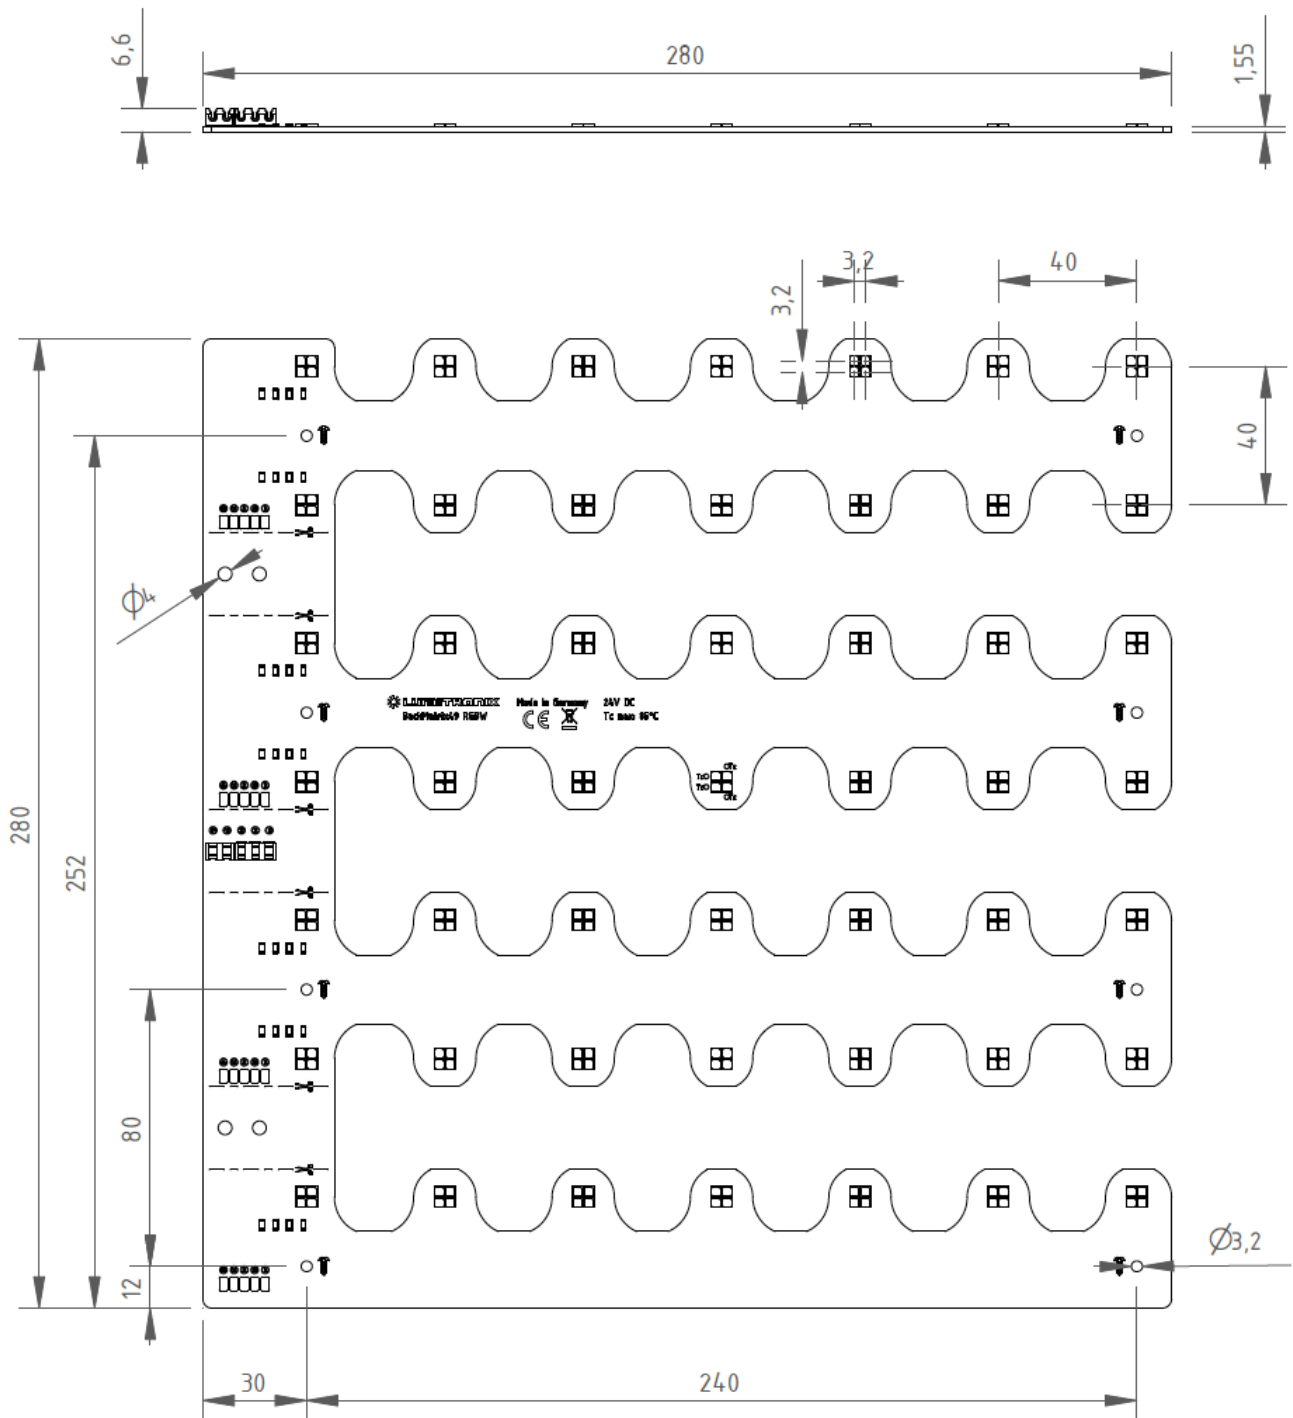


RADIANT FLUX vs. JUNCTION TEMPERATURE [°C]

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

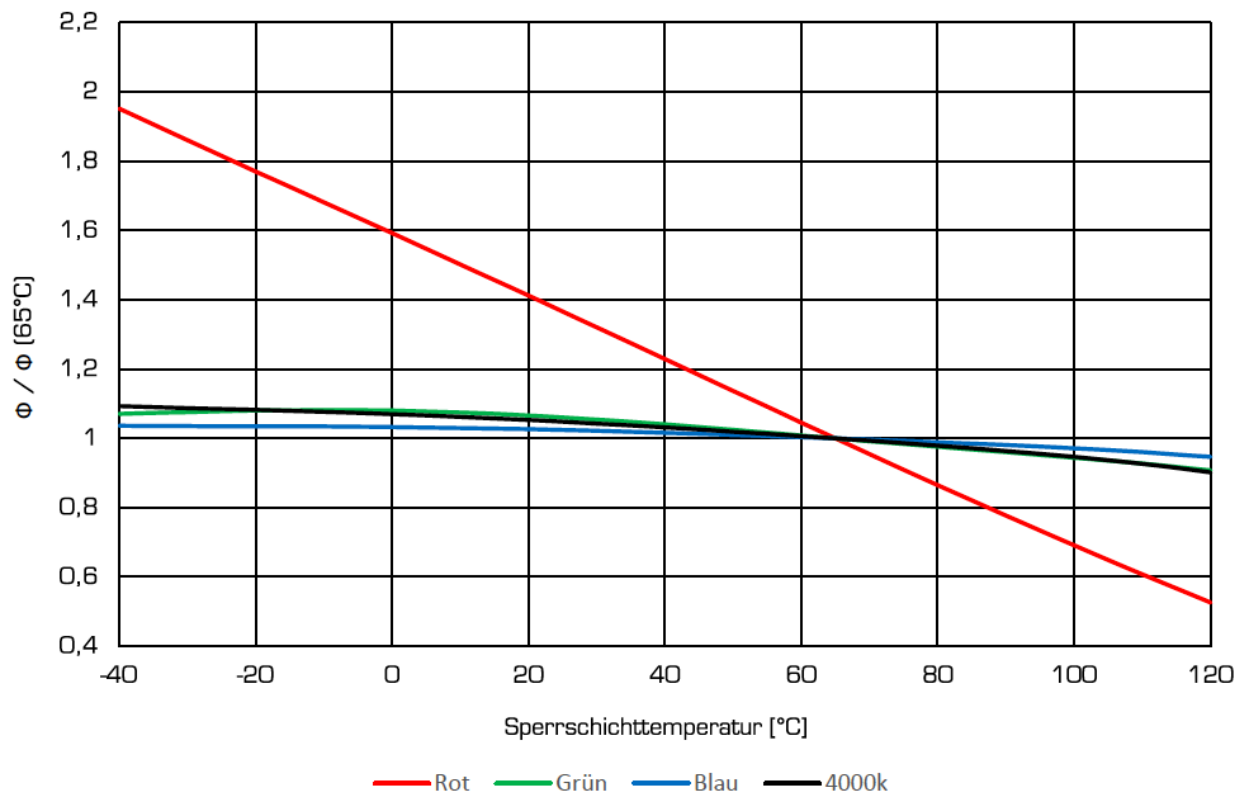

LUMINOUS FLUX vs. VOLTAGE

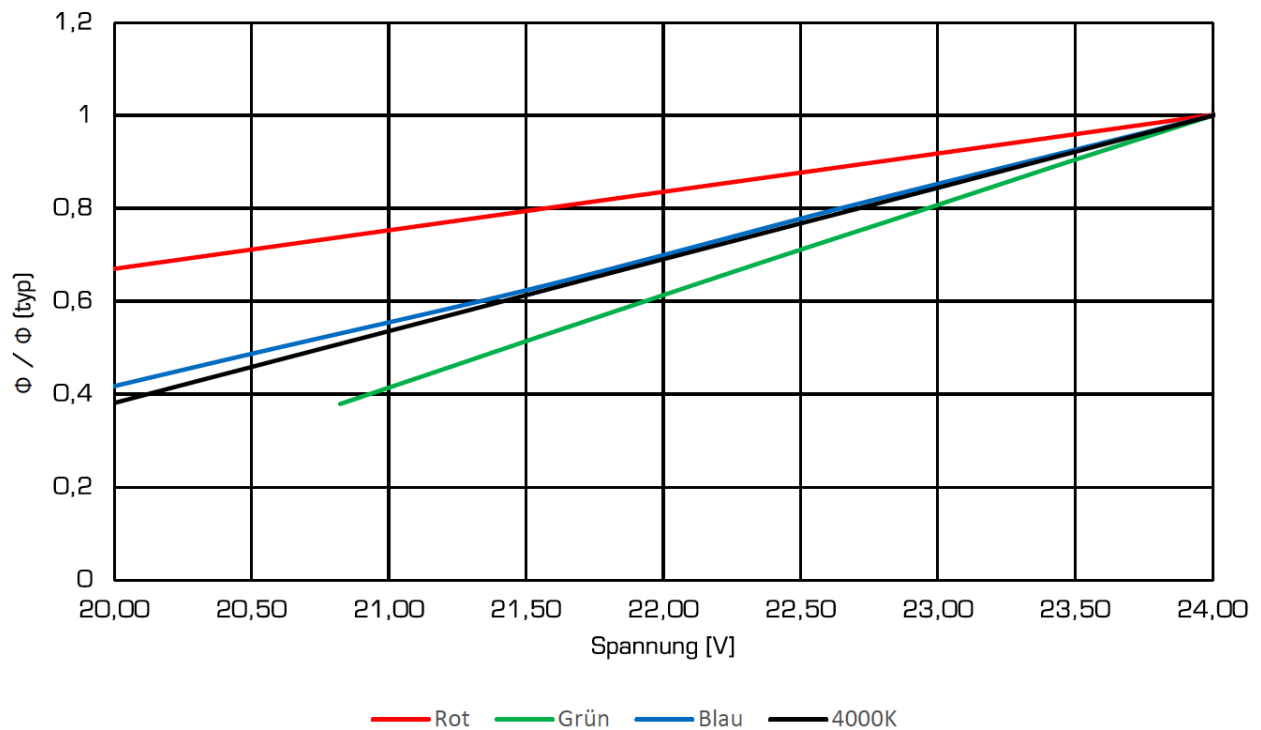

WARRANTY INFO

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM




This LED module has 5 years commercial warranty. Please refer to <https://www.lumistrips.com/lumistrips-en-warranty> for warranty terms.

MANUFACTURING INFO



The LED module is **made in Germany**, at a production line that uses the innovative manufacturing technology of plasma direct metallization, to turn substrates into electrical conductive and solderable circuit boards, even those that before have not been suitable for an assembly with electronic components.

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

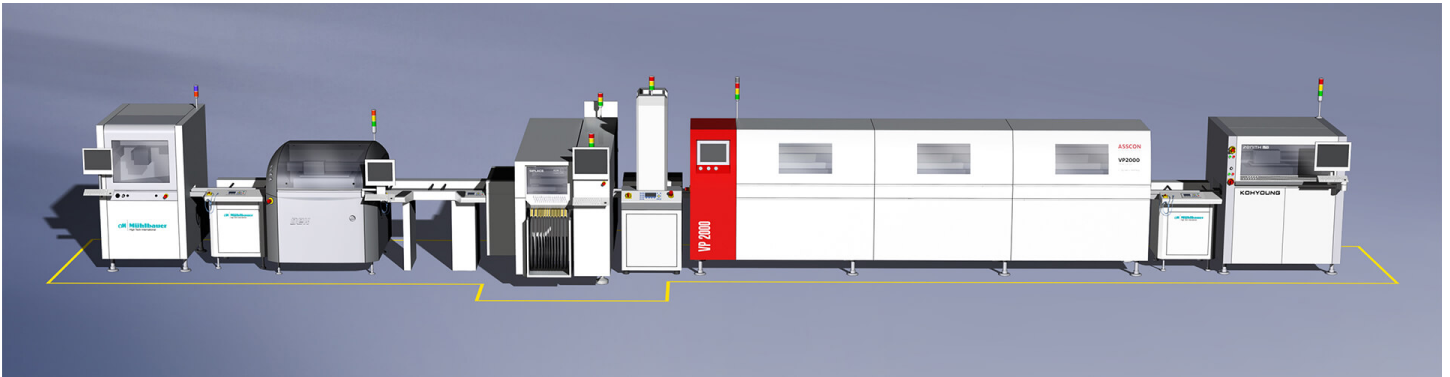

This LED module is made on a ISO-certified production line that has been tailored specifically to the requirements of assemblies with LED technology. Nearly one million components can be processed per day in the production line.

In the in-house assembly line, high performance automatic placement machines by Siemens place large and small components in an extremely fast and precise way. The vapour phase soldering machine by the market leader Asscon differs from ordinary convection soldering furnaces by its extraordinarily gentle soldering process under protection gas atmosphere. This prevents oxidation and cold solder joints and improves the thermal connection of component and PCB. This is particularly advantageous for LEDs, whose aging scales with the operating temperature.

The entire process is flexibly adaptable to the requirements and batch sizes of our customers and runs fully automatically.

- State-of-the-art machinery with the latest technology
- Production of circuit boards with lengths of up to 600 mm
- Traceability thanks to laser bar codes
- Maximum process safety with fully automated processing
- ISO certification



Our professional LED Strips and Modules use LEDs from market leaders

We develop and produce our LED strips at a state of the art facility in Germany, with the highest quality standards and by using only LEDs from market leaders such as Nichia, Samsung or Toshiba.

- **Nichia** is the LED market leader, with over 25% market share and decades of experience. Nichia researchers invented the blue and white LED production technology, also receiving the Nobel Prize for this achievement. Nichia LEDs are the **most efficient** (200 lm / w efficacy), durable (> 100,000 hours) and are also available with unique technologies such as **Optisolis**, CRI98+ natural light spectrum and **Rsp0a**, special white light for horticulture.
- **Samsung** is in the top 10 of global LED manufacturers and a well-known brand, renowned for the high performance of its products combined with the competitive price
- **Toshiba** is a Japanese conglomerate with a history of more than a century, now specialized in semiconductors, electronics and hardware, with nearly 20,000 employees and an annual turnover of 40 billion USD. Toshiba has built the TRI-R technology and built the LED chips used in **SunLike CRI97+ LEDs** produced by Seoul Semiconductor in South Korea. With the new **SunLike™ TRI-R™** technology from Toshiba-SSC (Seoul Semiconductor) and our strips and modules you can always enjoy a natural light source with the light spectrum very close to the sun.
- **Seoul Semiconductor** is in the top 10 of global LED manufacturers and renowned for innovation, durability and competitive price

Our strips have high quality components and professional support:


- We use LEDs from top brands and have superior designs
- We offer **professional support** for lighting projects
- The PCBs use high quality materials for best resistance, current flow and heat transfer
- Performance values in this datasheet match those in real world applications
- Function perfectly at high temperatures that would destroy many other strips.

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

CONNECTION OF LED MODULE


The insulation displacement terminal allows a solder free connection of the BackMatrix LED modules.

Connection cables with a conductor cross-section up to 1 sqmm (AWG18) can be used (SKU 37592). The tool Bit for BackMatrix LED modules (SKU 95402) is recommended for connection.

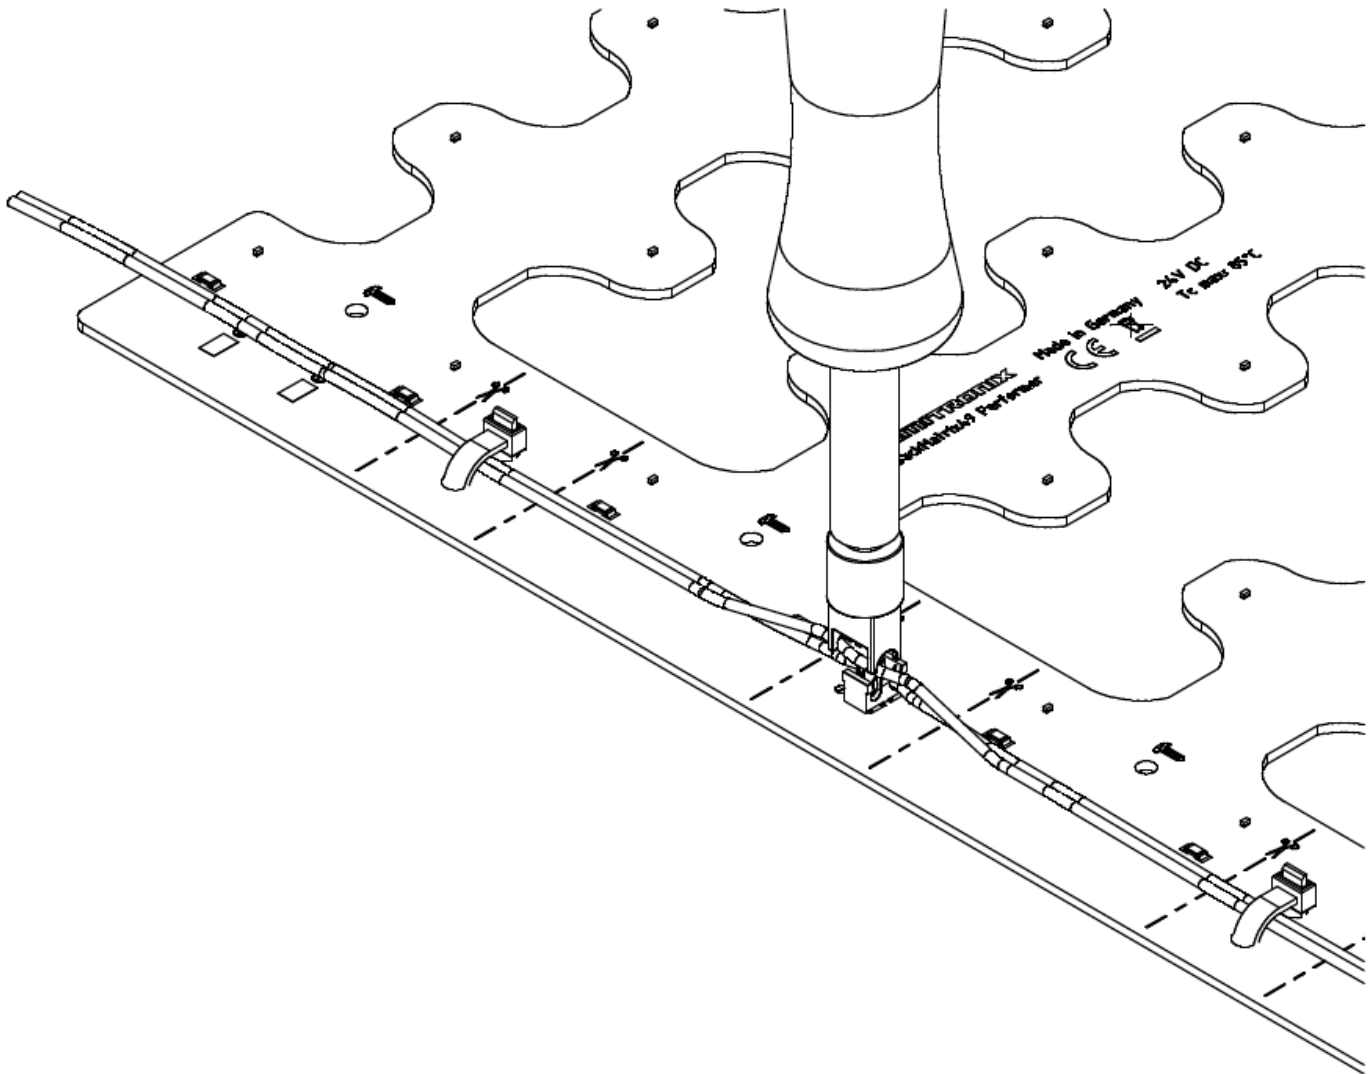

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

In this way, several modules can also be connected to each other without any problems. For additional cable fixation, holes are provided for e.g. cable ties.

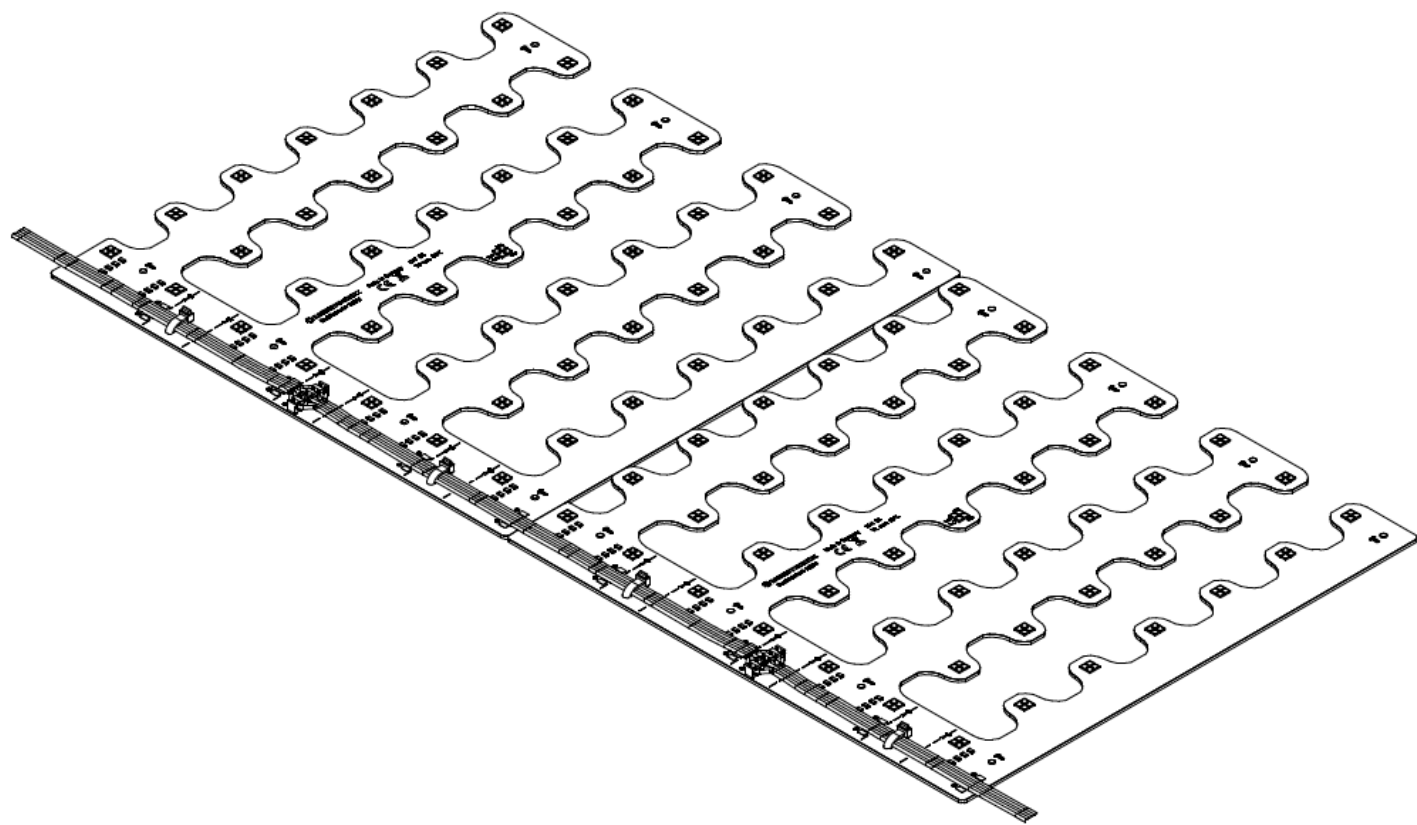

Alternatively, the BackMatrix LED modules can also be electrically connected in the classic way with a solder connection.

LED MODULE PRODUCT NAME EXPLAINED

BackMatrix3080 Nichia LED Module warm white CRI80 3000K 6500lm 24V 49 LEDs 29x29cm (23233 lm/sqm)						
Product name	Primary application:	Spectrum quality (CRI):	LED brand	Photometric data	Electrical data	Key Photometric and electrical data per meter, for easy comparison to other LED modules
	10XX = LED module for ambient light (up to 5000 lm/sqm)	xx80 = minimum acceptable	Product type		Dimensions	
	20XX = LED module for general light, when combined with other sources (up to 15000 lm/sqm)	xx90 = good			Mechanical data	
	30XX = LED module for general light (up to 25000 lm/sqm)	xx95 = very good				
	40XX = LED module for work light (up to 100000 lm/sqm)	xx98 = best (full spectrum light)				

BACKMATRIX-49-2080 NICHIA LED MODULE RGBW 4000K 2505LM 196 LEDS 24V 28.5W 120°
28X28CM

Due to the special conditions in the production process of LEDs, the specified values are statistical averages. The individual LED may deviate from them.

The LED modules and all their components must not be mechanically stressed.

Avoid undue claw action, e.g. by screwing or excessive bending.

The LED modules must not come into contact with aggressive chemical substances, either in operation or in storage.

The installation of the module (with the operating device) must be carried out in compliance with all applicable electrical and safety standards.

Pay attention to standard ESD precautions when installing the modules.

- The components on the LED modules must not be subjected to mechanical stress.
- The conductive paths on the boards must not be damaged or interrupted by the installation.
- Store and operate the LED modules only at a final humidity of 10% to 60%.

Our LED modules are not protected against overload, overtemperature and short-circuit currents. To operate the modules safely and reliably, it is therefore necessary to use an electronically stabilized power supply unit in which these

in which these safety functions are already integrated. If other power supplies than the ones distributed by us are used, the following protective

the following protective measures must be ensured on the power supply side:

MINIMUM REQUIREMENTS FOR POWER SUPPLIES: Short circuit protection - Overload protection - Overtemperature protection

- The installation of LED modules may only be carried out in compliance with all applicable regulations and standards by an authorized electrician.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Any infringement will result in compensation for damages. All rights reserved in the event of patent, utility model or design registration.

We reserve the right to make technical changes.

This LED module can be purchased via the following websites:

www.ledrise.eu / www.lumistrips.com