




Lumistrips

DATASHEET

LUMIFLEX1080 SEOUL LED STRIP PURE WHITE CRI80 4000K 4900LM 24V 140
LEDS/M 5M REEL IP67


SKU: 38669IP67

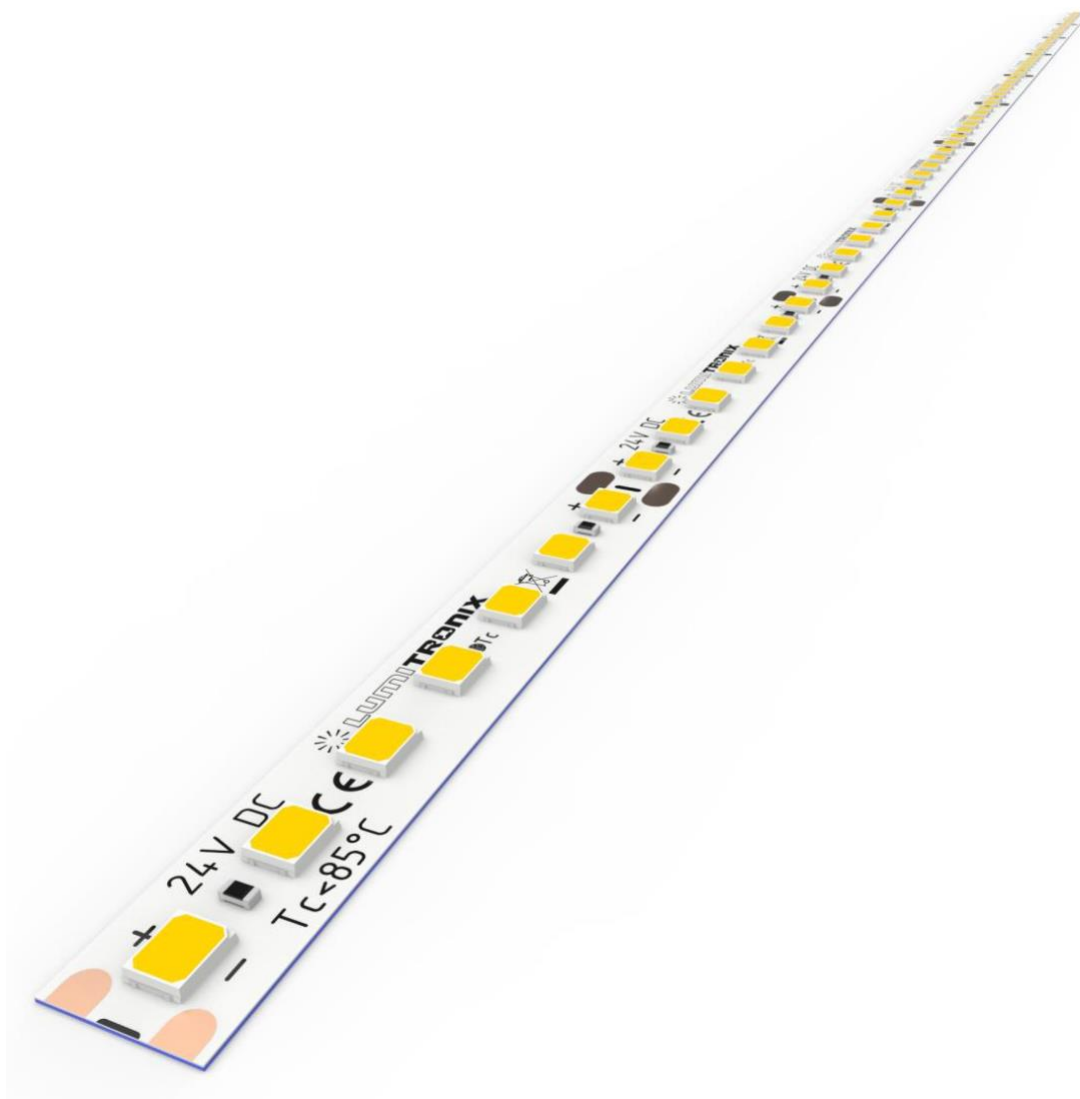

LUMIFLEX1080 SEOUL LED STRIP PURE WHITE CRI80 4000K 4900lm 24V 140 LEDS/M 5M IP67

Article number (SKU)		38669IP67	
Product name	LumiFlex1080 Seoul LED Strip pure white CRI80 4000K 4900lm 24V 140 LEDs/m 5m reel IP67		
Classification	Professional		
Model identifier (equivalent models)	LumiFlex700 Eco		
Photometric data (at T _J = 65°C, ± 10%)			
Light color	Pure white		
Binning	3-Step MacAdam		
Color temperature (K)	4000 K		
Dominant wavelength (nm)	-		
Luminous flux (lm)	4900 lm	980 lm/m	
Radiant power (mW)	-		
CRI (Ra)	>80		
Efficiency (lm/W)	136 lm/W		
Beam angle FWHP	120°		
Lifetime L80B10C1 (h)	>60.000 h		
Photometric code	840/339		
Electrical data (at T _J = 65°C, ± 10%) (reference settings)			
Operating mode	Constant voltage		
Voltage (V)	24 V		
Current (mA)	1500 mA		
Power (W)	36 W	7.2 W/m	
Standby power consumption (W)	0 W		
Dimmable	Yes		
Dimensions / Mechanical data		Metric units	Imperial units
Length	5000 mm		196.50"
Width	10 mm		0.40"
Height	1.75 mm		0.07"
Number of LEDs (pcs)	700 pcs		
Weight (g)			
Heat dissipation	Yes		
Temperatures			
Operating temperature at T _c	-40 °C to +85 °C		
Ambient temperature	-40 °C to +50 °C		
Storage temperature	-40 °C to +100 °C		
Approvals / Certifications			
CE / RoHS / Reach	Yes		
EN 62471 Risk group	RG0		
Energy efficiency class	D		
Mains voltage luminous efficacy (lm/W)	148 lm/W		
Version			
Date	14. Nov 2023		


LUMIFLEX1080 SEOUL LED STRIP PURE WHITE CRI80 4000K 4900LM 24V 140 LEDS/M 5M IP67

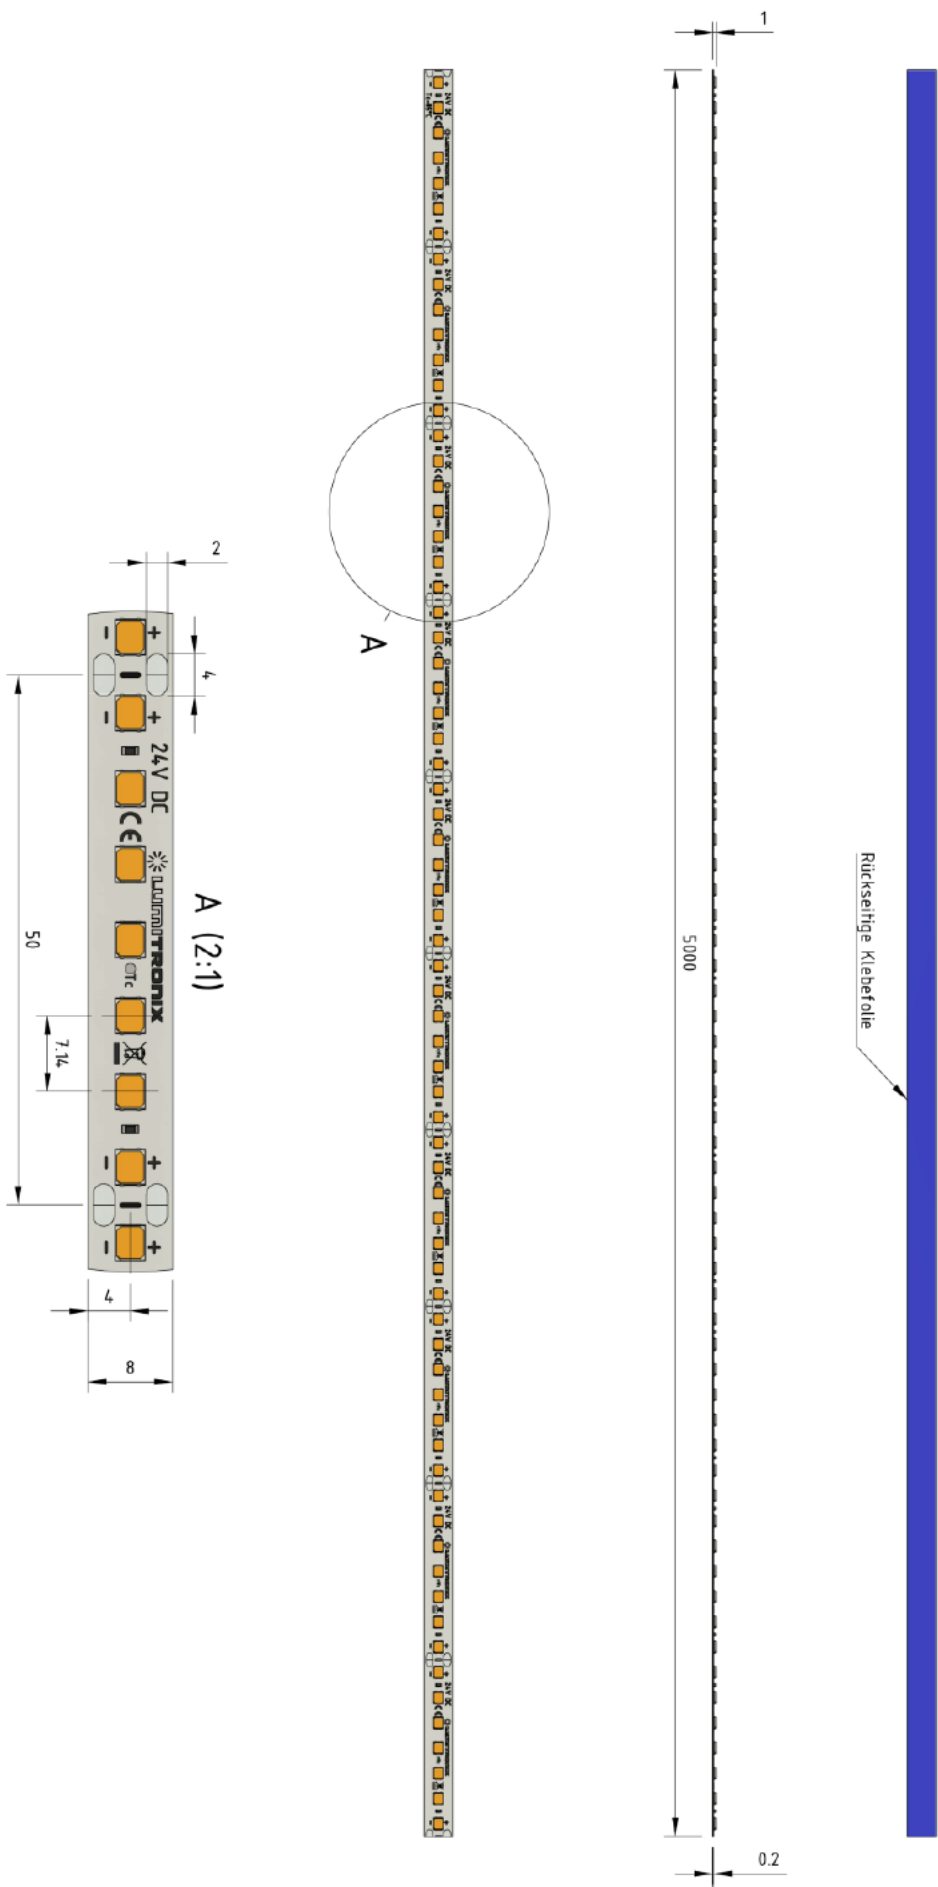

LumProtect® - Revolutionizing LED Lighting with Superior Waterproofing

In our cutting-edge facility located in Germany, LumProtect® is transforming the resilience of LED lighting. We developed a new and advanced lamination process about making our LED strips waterproof, achieving the impressive IP67 rating. This means complete dust resistance and the ability to withstand submersion in water up to 1 meter deep for as long as 30 minutes.

Our innovation lies in the application of multiple slim yet strong polymer layers to each side of the LED strip's flexible circuit board.

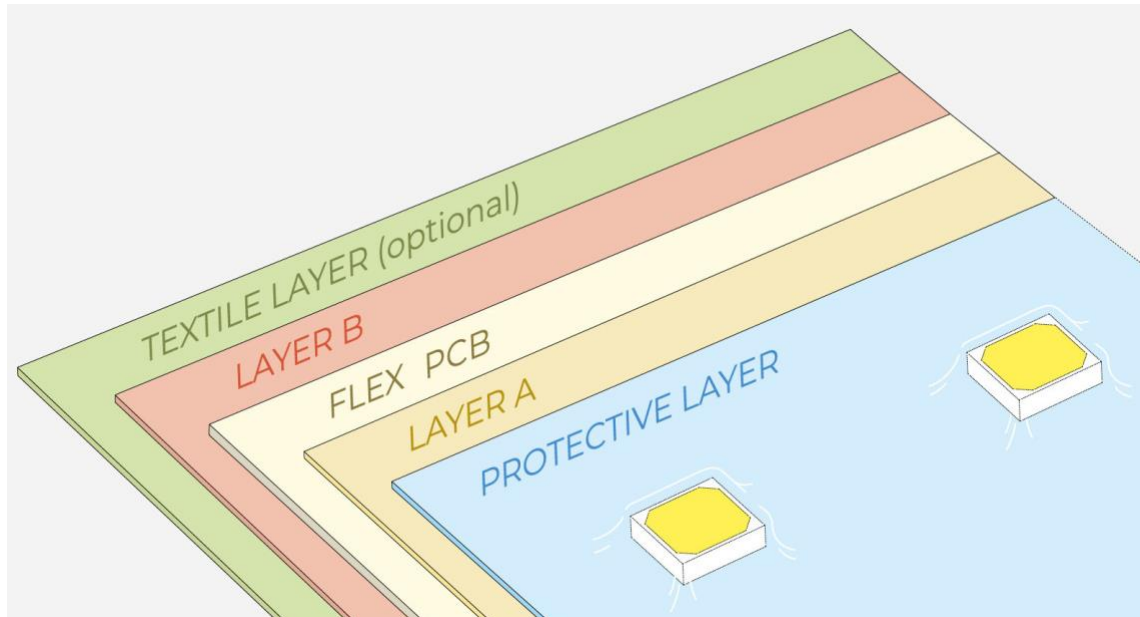

The combination of heat and pressure in our process ensures a flawless bond, encapsulating the components thoroughly while preventing any air entrapment. As a result, LumProtect® LED strips stand out in robustness and adaptability, surpassing our competitors.

Key Benefits of LumProtect®:


1. **Optimized Light Transmission:** Our specially designed polymer layers enhance light penetration, resulting in a brighter, crisper light emission.
2. **Slim and Sturdy:** Though exceptionally slender, the LED strips are engineered to endure bending and twisting, making them suitable for diverse installation needs.
3. **Dependable Reliability:** Thanks to their high dielectric strength, the LumProtect LED strips offer unmatched safety and dependability.
4. **Long-Lasting True Colors:** Enjoy consistent color without fading or alteration over time; the LEDs in our waterproof strips retain their original brilliance.
5. **Unparalleled Flexibility:** Designed to fit into any space, these strips maintain their waterproof integrity in various configurations.
6. **Robust Endurance:** Our lamination technology acts as a shield for the LED strips. It protects against the elements - intense sunlight, heavy rainfall, and strong winds - ideal for outdoor environments. They also resist a variety of chemicals, gases, and dust. Additionally, their durability extends to resistance against accidental impacts and drops.



Protected against
various
chemicals



Protected against
physical stress and
weather influences



Protected against
humidity
(IP67 possible)



Protected against
gases, dust and
other particles



WARRANTY INFO

This LED Strip has 2 years commercial warranty.

Please refer to <https://www.lumistrips.com/lumistrips-en-warranty> for warranty terms.

MANUFACTURING INFO




This LED strip is **made in Germany**, at a flex production line that uses the innovative manufacturing technology of plasma direct metallization, to turn flexible substrates into electrical conductive and solderable circuit boards, even those that before have not been suitable for an assembly with electronic components.

The LED strip is made IP67 waterproof at the same facility, with LumProtect.



LED strip made in reel-to-reel manufacturing, a production method that offers many advantages, from delivering custom designs without the error of soldering to the use of new base materials that make new designs possible, with easier handling, installation and transportation.

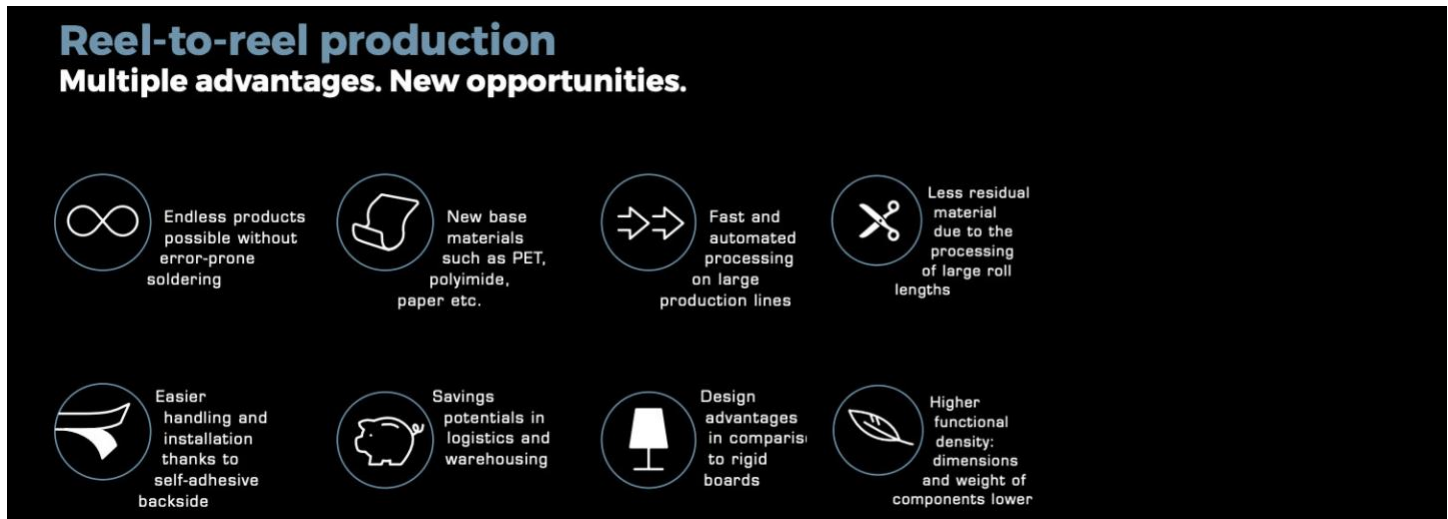

Our professional LED Strips and Modules use LEDs from market leaders

We develop and produce our LED strips at a state of the art facility in Germany, with the highest quality standards and by using only LEDs from market leaders such as Nichia, Samsung or Toshiba.

- **Nichia** is the LED market leader, with over 25% market share and decades of experience. Nichia researchers invented the blue and white LED production technology, also receiving the Nobel Prize for this achievement. Nichia LEDs are the **most efficient** (200 lm / w efficacy), durable (> 100,000 hours) and are also available with unique technologies such as **Optisolis**, CRI98+ natural light spectrum and **RspDa**, special white light for horticulture.
- **Samsung** is in the top 10 of global LED manufacturers and a well-known brand, renowned for the high performance of its products combined with the competitive price
- **Toshiba** is a Japanese conglomerate with a history of more than a century, now specialized in semiconductors, electronics and hardware, with nearly 20,000 employees and an annual turnover of 40 billion USD. Toshiba has built the TRI-R technology and built the LED chips used in **SunLike CRI97+ LEDs** produced by Seoul Semiconductor in South Korea. With the new **SunLike™ TRI-R™** technology from Toshiba-SSC (Seoul Semiconductor) and our strips and modules you can always enjoy a natural light source with the light spectrum very close to the sun.
- **Seoul Semiconductor** is in the top 10 of global LED manufacturers and renowned for innovation, durability and competitive price


Our strips have high quality components and professional support:

- We use LEDs from top brands and have superior designs


LUMIFLEX1080 SEOUL LED STRIP PURE WHITE CRI80 4000K 4900LM 24V 140 LEDS/M 5M IP67

- We offer **professional support** for lighting projects
- The PCBs use high quality materials for best resistance, current flow and heat transfer
- Performance values in this datasheet match those in real world applications
- Function perfectly at high temperatures that would destroy many other strips

LED STRIP PRODUCT NAME EXPLAINED

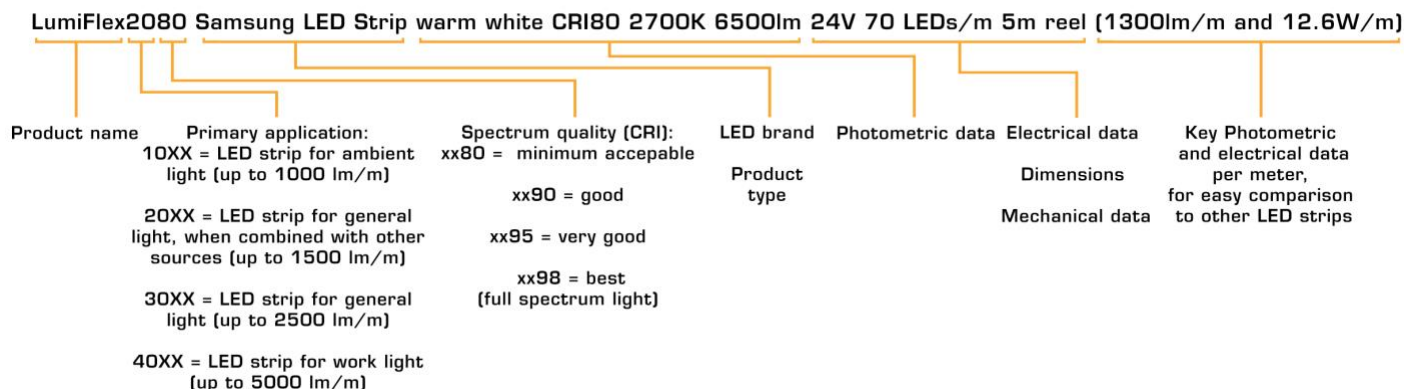

LUMINOUS FLUX vs. TEMPERATURE

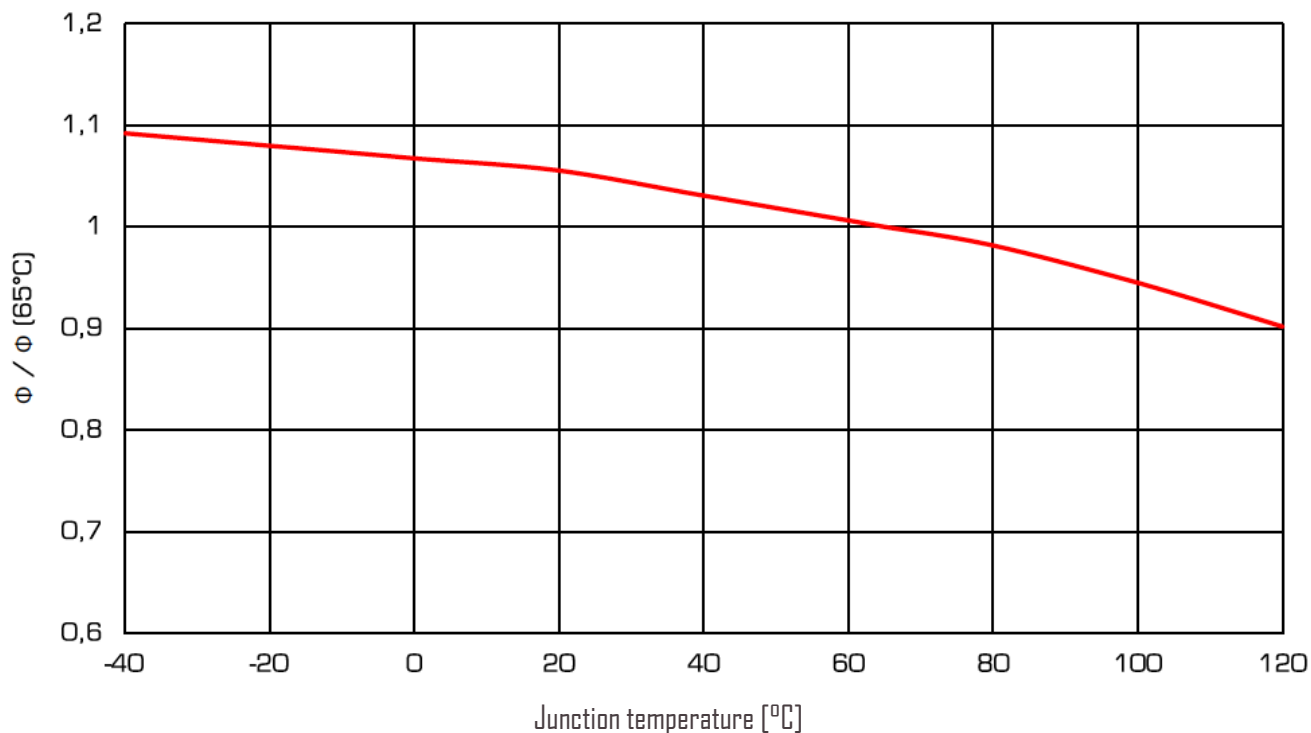

Due to the special conditions in the production process of LEDs, the specified values are statistical averages. The individual LED may deviate from them.

The LED modules and all their components must not be mechanically stressed.

Avoid undue claw action, e.g. by screwing or excessive bending.

The LED modules must not come into contact with aggressive chemical substances, either in operation or in storage.

The installation of the module (with the operating device) must be carried out in compliance with all applicable electrical and safety standards.

Pay attention to standard ESD precautions when installing the modules.

- The components on the LED modules must not be subjected to mechanical stress.
- The conductive paths on the boards must not be damaged or interrupted by the installation.
- Store and operate the LED modules only at a final humidity of 10% to 60%.

Our LED modules are not protected against overload, overtemperature and short-circuit currents. To operate the modules safely and reliably, it is therefore necessary to use an electronically stabilized power supply unit in which these

in which these safety functions are already integrated. If other power supplies than the ones distributed by us are used, the following protective

the following protective measures must be ensured on the power supply side:

MINIMUM REQUIREMENTS FOR POWER SUPPLIES: Short circuit protection - Overload protection - Overtemperature protection

- The installation of LED modules may only be carried out in compliance with all applicable regulations and standards by an authorized electrician.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Any infringement will result in compensation for damages. All rights reserved in the event of patent, utility model or design registration. We reserve the right to make technical changes.

This LED strip can be purchased via the following websites:

www.ledrise.eu / www.lumistrips.com

