


Wall Lights | 220-240 V | topLED 4 W 1050 mA | CRI 90
7978



Technical data	
Designer	Davide Oppizzi
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	Flood
Light emission direction	upward
Power	4 W
Luminous flux (source)	363 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	Yes
Tilting	Yes
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0,872 Kg

Finishing casing	
Material	Aluminium
Colour	black RAL 9005
Processing	Coating
Finishing diffuser	
Material	PC
Colour	amber
Finishing mounting frame	
Material	Aluminium
Colour	black RAL 9005
Processing	Coating



Wall Lights | 220-240 V | topLED 4 W 1050 mA | CRI 90
7978

Single emission wall lights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 363 lm, with a 90.8 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a black ral 9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0,872 kg. The power supply driver is included in the delivery.



The total absorbed power is 4 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	42 %
Luminous flux (source)	363 lm
Luminaire luminous flux	156.07 lm
Consumption	4 W
Luminaire efficacy	39 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	< 28

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	69°

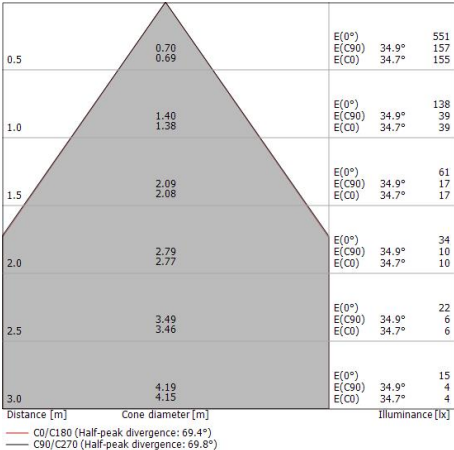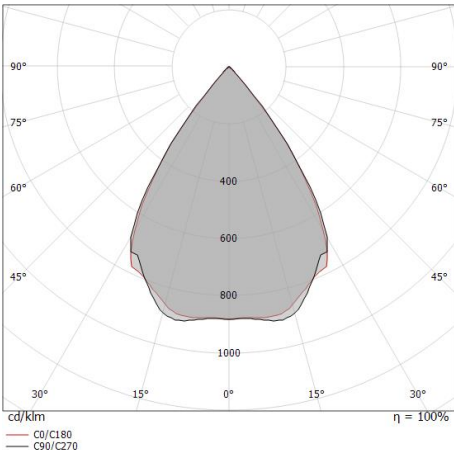



Diffuser

Code
KIT0036



Diffuser

Code
KIT0056



Diffuser

Code
KIT0058